


HOCK CUTTER

Model No. PHC-4

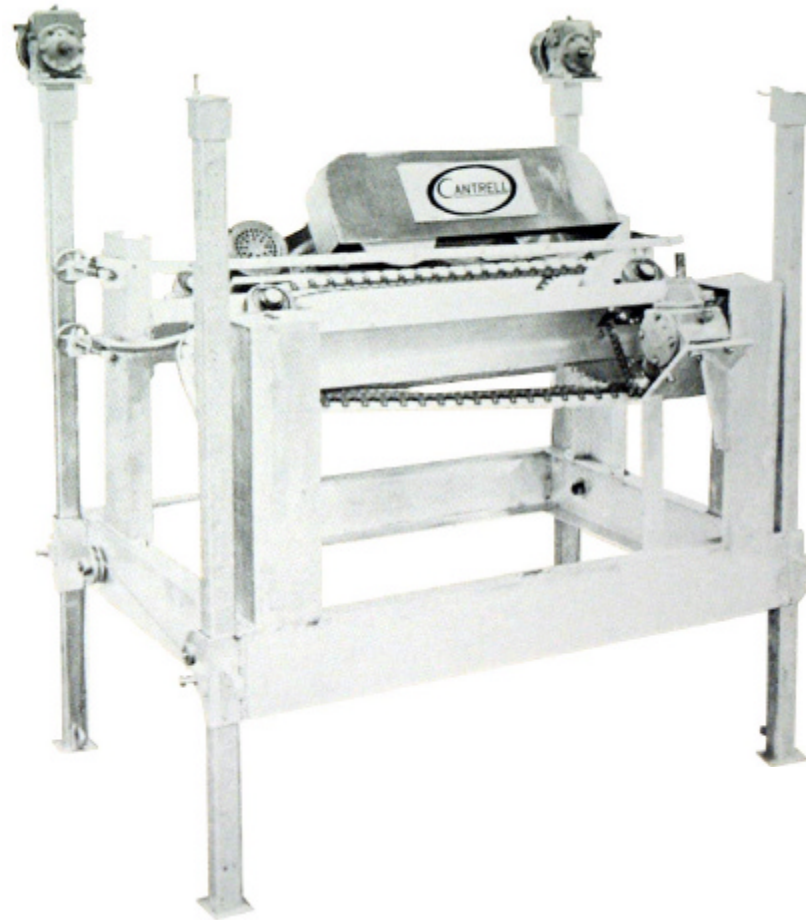

The Cantrell Automatic Hock Cutter Model PHC-4 is a field proven technique of cutting hocks on broilers as well as hens at an accuracy rate in the high 90's.

PLANT PROVEN RELIABILITY

Due to the simple design of few moving parts, you can expect the Cantrell Hock Cutter to give you continuous day-in, day-out precision cutting performance. By use of a specially designed chain, the hock cutter automatically positions and severs the hock joint, by nicking, disjuncting and cutting — therefore greatly reducing the number of short hocks. This in turn further increases the efficiency of the automatic equipment on the eviscerating line.

Cantrell Machine Co., Inc.

P O Box 757
1400 S. Bradford Street
Gainesville, Ga. 30503

Phone: 770-536-3611
Fax: 770-531-0832
www.cantrell.com



HOCK CUTTER

Model No. PHC-4



DIFFERENT MODELS

The PHC-4 is available in aluminum or high grade stainless steel frame with an electric or hydraulic drive system.

FEATURES

- Provided with a back-up motor which is wired to switch on automatically if the primary motor burns out — eliminating downtime.
- Available with an electric or hydraulic motor.
- Plenty of adjustments for variance in different sizes of birds.
- Available in all stainless or all aluminum frame.

MAINTENANCE & CLEANING


After the Hock Cutter has been properly installed, only a few simple adjustments should be made. Ordinary maintenance, such as greasing all fittings and sharpening or replacing circular blades is all the servicing necessary. Extra attention has been given to assure that all edges are smooth and covers are easily removable to allow the cleaning personnel access to thoroughly clean the machine.

SIZING YOUR BIRDS AFTER THE HOCK CUTTER

To further help you attain higher yields, the Cantrell Bird Weight Selection System is offered to work in conjunction with the Hock Cutter to eliminate many of the problems caused by weight differences when you work with more than one eviscerating line. The system can also be custom fitted to work with your existing hock cutter.

TECHNICAL SPECIFICATIONS

CAPACITY:	7200 BPH
INSTALLED POWER:	2 X 2 HP (1.48KW)
PLUMBING:	2 X 3/8" WATER CONNECTION
NET WEIGHT:	900 LBS / 408 KG
GROSS WEIGHT:	1300 LBS / 590 KG
CRATED VOLUME:	144 FT. ³ (4.41 M ³)

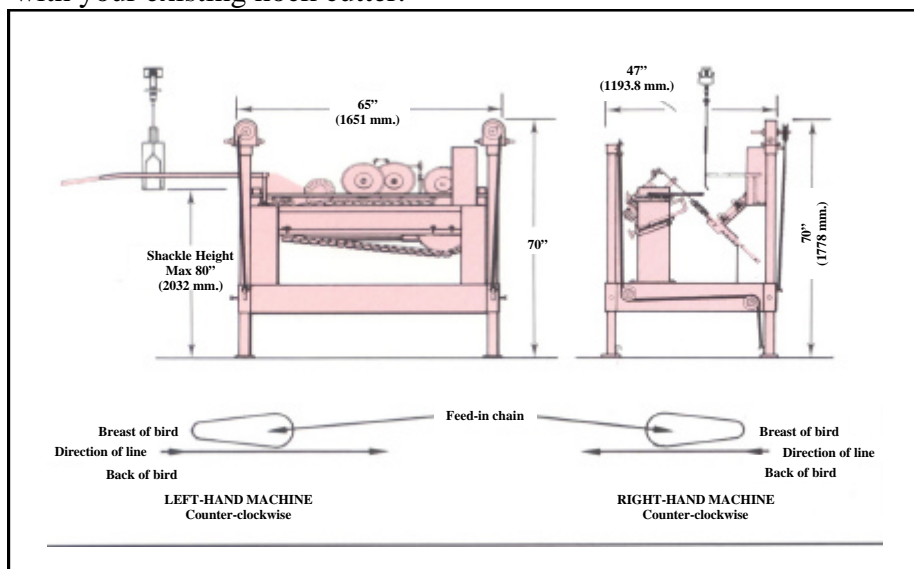

The specifications as stated herein are the most current at the time of publication. However, consistent with our standard of continual product improvement, we reserve the right to change the design without notice or obligation to modify any equipment previously sold or delivered.

Cantrell Machine Co., Inc.

P O Box 757 · 1400 S. Bradford Street · Gainesville, Ga. 30503 · 770-536-3611 · (Fax) 770-531-0832