

THE RAM INSIDE/OUTSIDE BIRD WASHER



The Cantrell Ram Inside/Outside Bird Washer is designed to fit into a 180° turn near the end of the eviscerating line to insure a thorough cleansing of the bird. Inside spray probes penetrate the neck cavity from the body cavity, thereby insuring proper drainage of cleansing media and contaminants. The exterior is cleaned by a manifold of high-pressure spray nozzles arranged to provide maximum coverage with minimal water usage. The Bird Washer can be used with liquid bactericide such as chlorine or TSP. Features 20 unit design for high speed lines, long-stroke probe passes through the neck, flexible probe movement, adjustable nozzles (probe) and leaf fat lifters.

The Cantrell Inside/Outside Bird Washer is constructed of USDA and FDA approved materials and is listed on the USDA list of approved poultry processing equipment.


Cantrell Machine Co., Inc.

P O Box 757
1400 S. Bradford Street
Gainesville, Ga. 30503

Phone: 770-536-3611
Fax: 770-531-0832
www.cantrell.com



THE RAM INSIDE/OUTSIDE BIRD WASHER

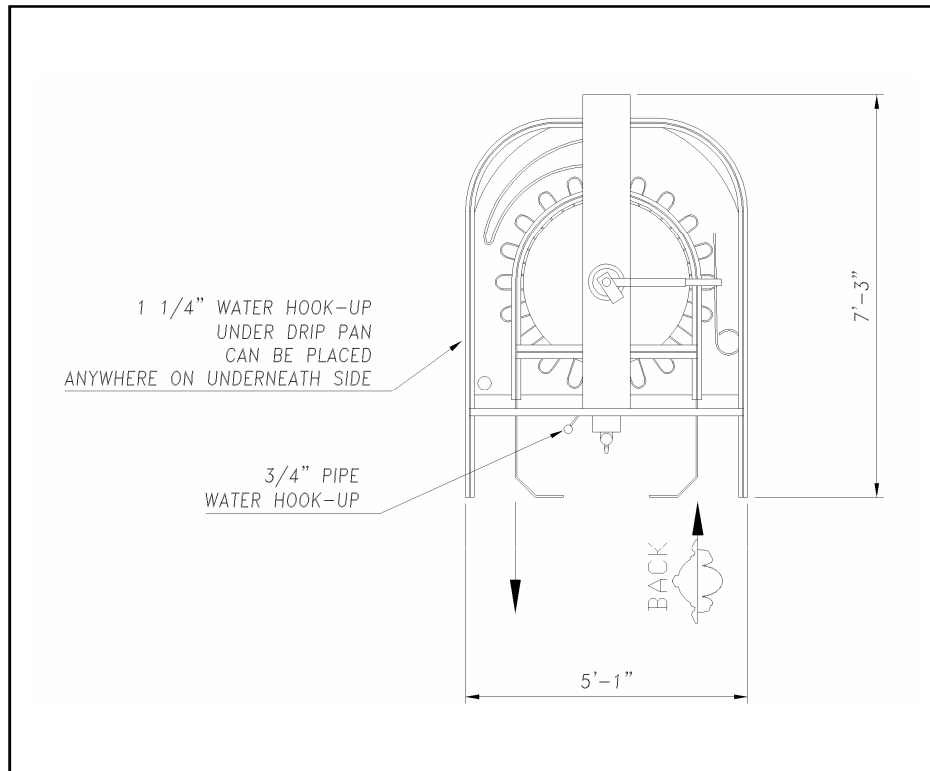

TECHNICAL SPECIFICATIONS

Connection:	1 1/4" Main water hook-up, 3/4" for outside manifold (55 GPM @ 150 PSI)
Capacity:	9600 BPH (based on 20 unit machine)
Position In Line:	After the Final Control Machine & before the Bird Unloader
Rotation:	Determined by facing back of bird
Length:	7' - 3"
Width:	5' - 1"

The specifications as stated herein are the most current at the time of publication. However, consistent with our standard of continual product improvement, we reserve the right to change the design without notice or obligation to modify any equipment previously sold or delivered.