

▶ Killer Model No. MK-3



▶ The hydraulically operated MK-3 Killer renders an accurate cut on each bird ensuring a complete bleed out. Specialized guide bars position the head between rotating rollers where pressure is placed on the jaw forcing the mouth open. This assures positioning so both the carotid artery and jugular vein can be cut by the rotating blade without lacerating the spinal cord, esophagus, or windpipe. The positioning wheel keeps the wings and body in a fixed position protecting them from damage. Designed to accommodate all size birds, the Killer cuts 40-250 birds per minute.


CANTRELL

Parts | Equipment | Systems | Solutions

➤ Killer Model No. MK-3

The Hydraulic Power Pack

The Killer is powered by a hydraulic power pack. The power pack should be located as near the Killer as possible, keeping the length of pressure lines to a minimum.

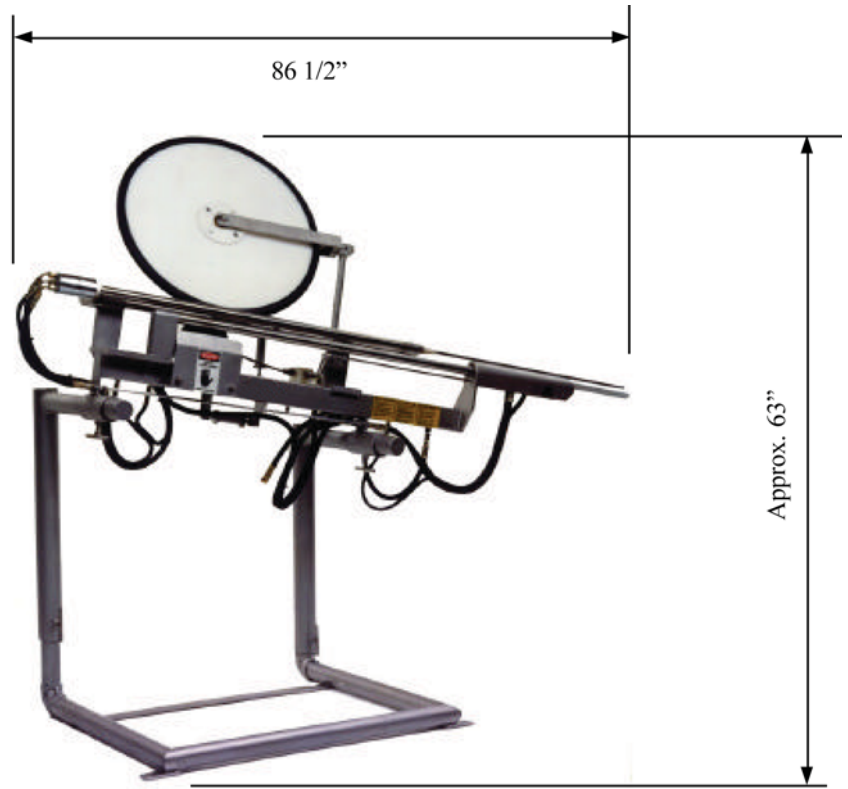

TECHNICAL SPECIFICATIONS

Position In Line:	After Stunner
Construction:	Stainless Steel
Net Weight:	200 lbs. / 91 kg
Gross Weight:	300 lbs. / 136 kg
Width:	39 in. / 991 mm Approx.
Length:	86 1/2 in. / 2197 mm
Height:	63 in. / 1600 mm Approx.

The specifications as stated herein are the most current at the time of publication. However, consistent with our standard of continual product improvement, we reserve the right to change the design without notice or obligation to modify any equipment previously sold or delivered.